



# PJV1701

## 20V P-Channel MOSFET


**Voltage** -20 V **Current** -0.45 A

### Features

- Switching with Low RDS(ON)
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. (Halogen Free)

### Mechanical Data

- Case: SOT-723 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00005 ounce, 0.0013 gram
- Marking: KD

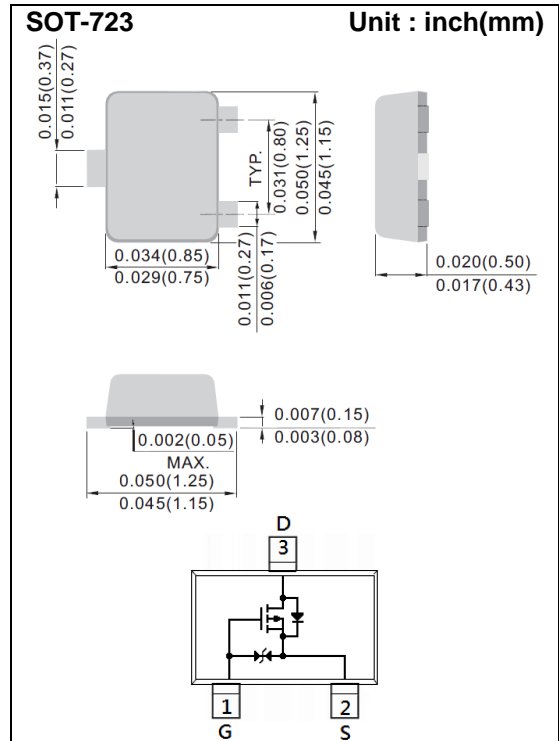

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Drain-Source Voltage	V <sub>DS</sub>	-20	V
Gate-Source Voltage	V <sub>GS</sub>	±12	V
Continuous Drain Current	I <sub>D</sub>	-0.45	A
Pulsed Drain Current	I <sub>DM</sub>	-0.9	A
Power Dissipation	P <sub>D</sub>	T <sub>a</sub> =25°C	150
		Derate above 25°C	1.2
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~150	°C
Typical Thermal resistance	R <sub>θJA</sub>	833	°C/W
- Junction to Ambient (Note 1)			



# PJV1701

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
<b>Static</b> (Note 2)						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-20	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.35	-0.77	-1.1	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-0.45A$	-	0.40	0.52	$\Omega$
		$V_{GS}=-2.5V, I_D=-0.35A$	-	0.55	0.70	
		$V_{GS}=-1.8V, I_D=-0.25A$	-	0.80	0.95	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-20V, V_{GS}=0V$	-	-	-1	$\mu A$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 12V, V_{DS}=0V$	-	-	$\pm 20$	$\mu A$
Forward Transconductance	$g_{FS}$	$V_{DS}=-10V, I_D=-0.45A$	-	1.2	-	S
Diode Forward Voltage	$V_{SD}$	$I_S=-0.45A, V_{GS}=0V$	-	-0.85	-1.2	V
<b>Dynamic</b> (Note 3)						
Input Capacitance	$C_{iss}$	$V_{DS}=-16V, V_{GS}=0V,$ $f=1.0MHz$	-	115	-	$\mu F$
Output Capacitance	$C_{oss}$		-	15	-	
Reverse Transfer Capacitance	$C_{rss}$		-	9	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=-10V, I_D=-200mA,$ $V_{GS}=-4.5V,$ $R_G=10\Omega$	-	9.2	-	ns
Turn-On Rise Time	$t_r$		-	6	-	
Turn-Off Delay Time	$t_{d(off)}$		-	33	-	
Turn-Off Fall Time	$t_f$		-	21	-	

**NOTES :**

1.  $R_{\theta JA}$  is surface mounted on a 1 inch FR-4 with 2oz. square pad of copper
2. Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$
3. Guaranteed by design, not subject to production testing.



# PJV1701

## TYPICAL CHARACTERISTIC CURVES

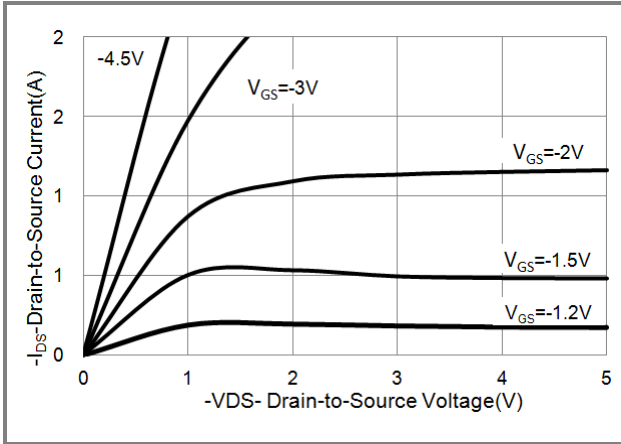


Fig.1 Output Characteristics

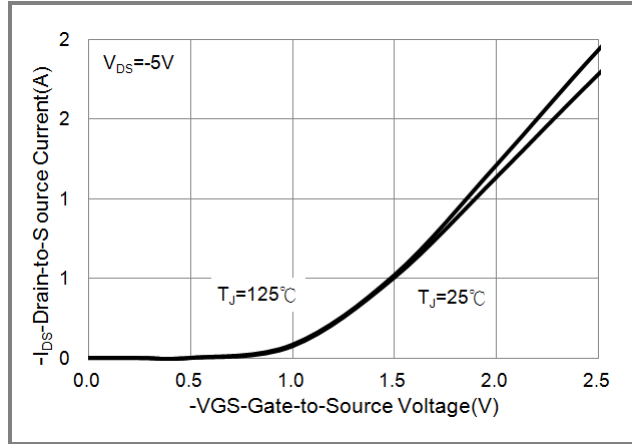


Fig.2 Transfer Characteristics

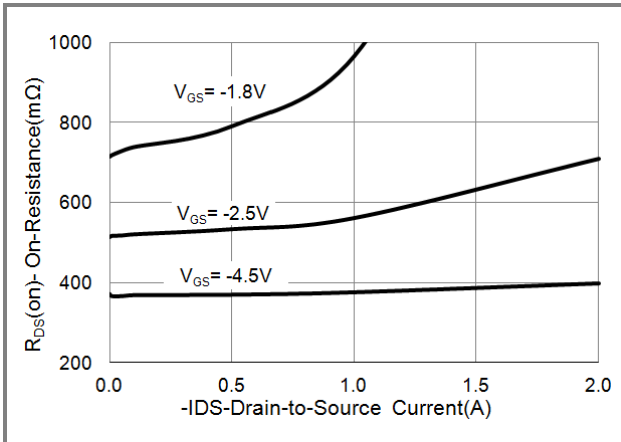


Fig.3 On-Resistance vs. Drain Current

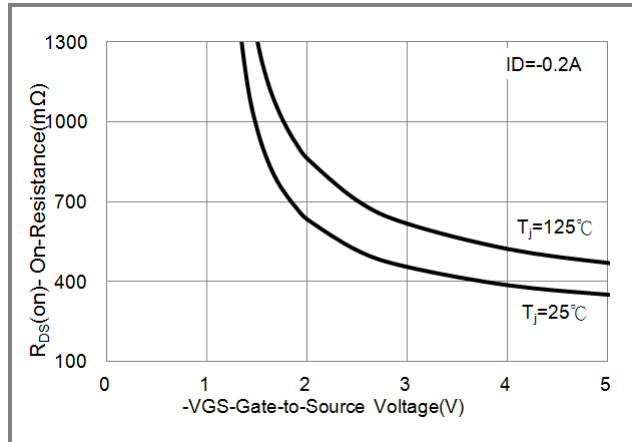


Fig.4 On-Resistance Variation with VGS.

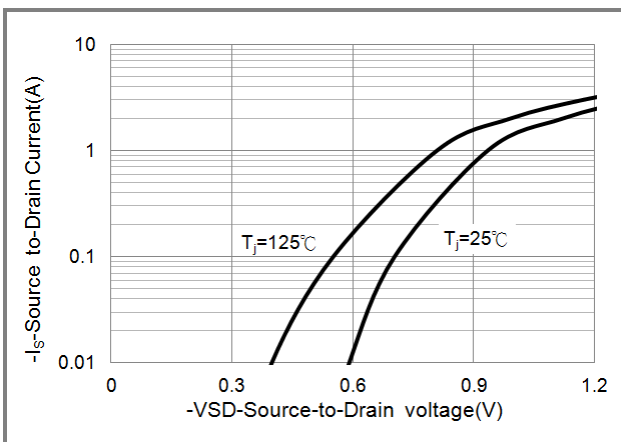


Fig.5 Body Diode Characteristics

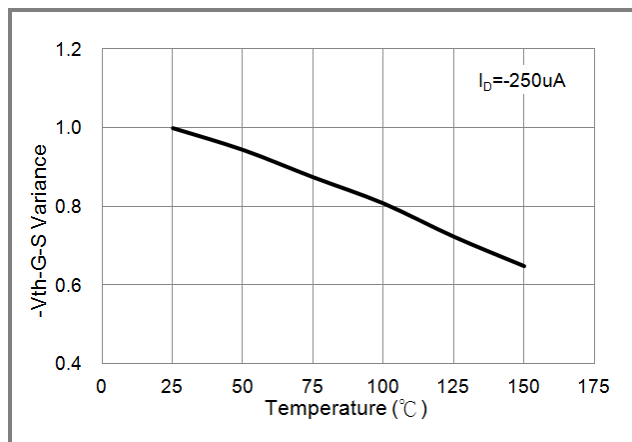


Fig.6 Threshold Voltage




# PJV1701

## PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing type	Marking	Version
PJV1701_R1_00001	SOT-723	8K pcs / 7" reel	KD	Halogen free

## MOUNTING PAD LAYOUT

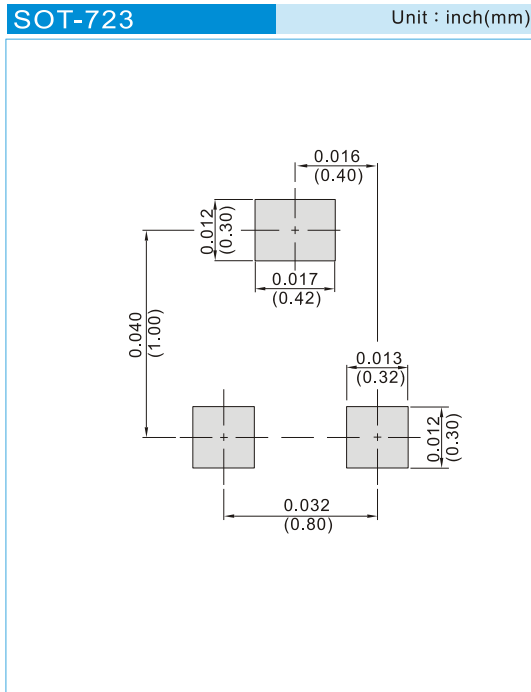



## PJV1701

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.